

AXIAL SILASTIC GUARD JUNCTION STANDARD RECTIFIER

1A1 THRU 1A9


VOLTAGE RANGE 50 to 1000 Volts
CURRENT 1.0 Ampere

FEATURES

- Low coat construction
- Low forward voltage drop
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed:
260°C/10 secods/.375”(9.5mm)lead length at 5 lbs(2.3kg) tension

MECHANICAL DATA

- Case: Transfer molded plastic
- Epoxy: UL94V-O rate flame retardant
- Polarity: Color band denotes cathode end
- Lead: Plated axial lead, solderable per MIL-STD-202E method 208C
- Mounting position: Any
- Weight: 0.0070 ounce, 0.20 grams

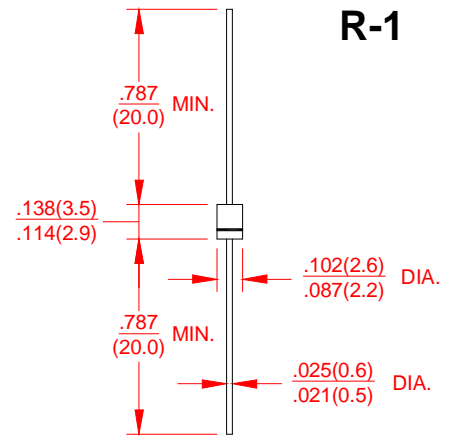

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

	SYMBOLS	1A1	1A2	1A3	1A4	1A5	1A6	1A7	1A8	1A9	UNIT	
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	1200	1500	Volts	
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	840	1050	Volts	
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	1200	1500	Volts	
Maximum Average Forward Rectified Current 0.375”(9.5mm) lead length at $T_A=25^\circ\text{C}$	$I_{(AV)}$	1.0									Amps	
Peak Forward Surge Current 8.3mS single half sine wave superimposed on rated load (JEDEC method)	I_{FSM}	25									Amps	
Maximum Instantaneous Forward Voltage @ 1.0A	V_F	1.1									Volts	
Maximum DC Reverse Current at Rated DC Blocking Voltage per element	I_R	$T_A = 25^\circ\text{C}$									5.0	μA
		$T_A = 125^\circ\text{C}$										
Maximum Full Load Reverse Current, full cycle average 0.375”(9.5mm)lead length at $T_L=75^\circ\text{C}$	$I_{R(AV)}$	30									μA	
Typical Junction Capacitance (Note 1)	C_J	40									pF	
Typical Thermal Resistance (Note 2)	$R_{\theta JA}$	50									$^\circ\text{C/W}$	
Operating Junction Temperature Range	T_J	-55 to +150									$^\circ\text{C}$	
Storage Temperature Range	T_{STG}	-55 to +150									$^\circ\text{C}$	

Notes:

1. Measured at 1.0MHz and Applied Reverse Voltage of 4.0V DC.
2. Thermal Resistance from junction to Ambient at .375”(9.5mm)lead length, P.C.board mounted.

website: <http://www.ienk.com>

AXIAL SILASTIC GUARD JUNCTION STANDARD RECTIFIER

1A1 THRU 1A9

VOLTAGE RANGE 50 to 1000 Volts
CURRENT 1.0 Ampere

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

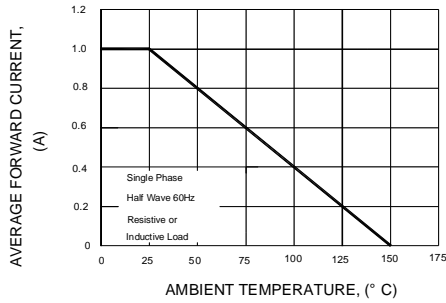


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

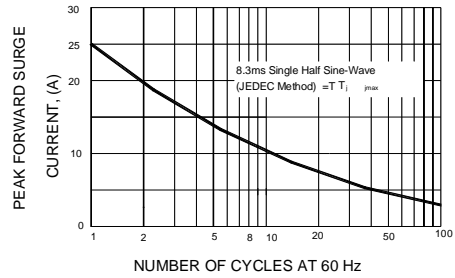


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

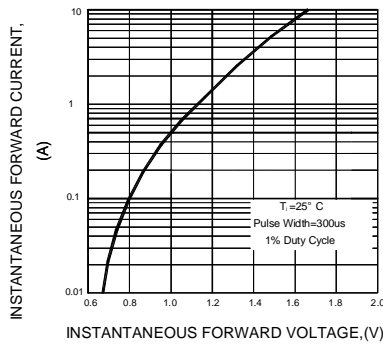


FIG.4-TYPICAL REVERSE CHARACTERISTICS

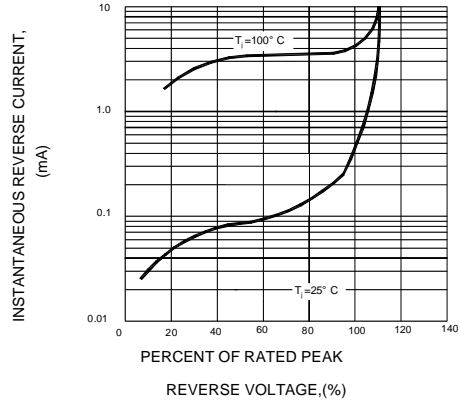


FIG.4-TYPICAL JUNCTION CAPACITANCE

