
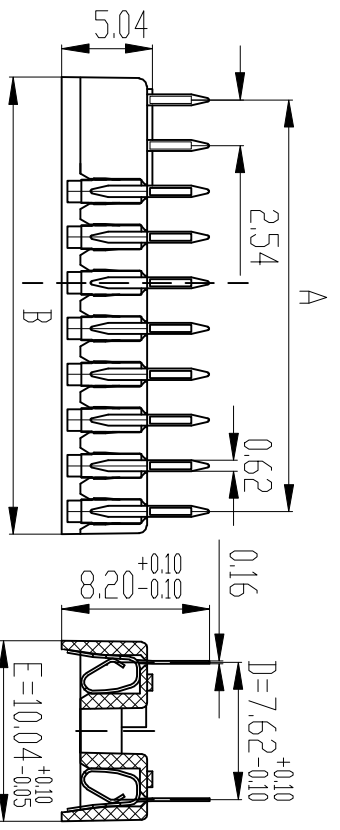


接触电阻: $\leq 20m\Omega$
 绝缘电阻: $\geq 1000M\Omega$
 额定电流: 1A/针
 环境温度: $-55^{\circ}\sim 105^{\circ}$
 焊接温度时间: $\leq 235^{\circ}$, $\leq 3s$
 触点材质: 磷青铜 (连带) 镀镍 $\geq 130\mu$
 绝缘座: PBT
 耐压: 1000VAC/30s,
 无击穿、闪络、飞弧
 盐雾测试: 24小时不生锈
 沉降盐雾浓度: $(\pm 1)\%NaCl$ (ml/ml)
 试验箱温度: $(35\pm 2)^{\circ}C$

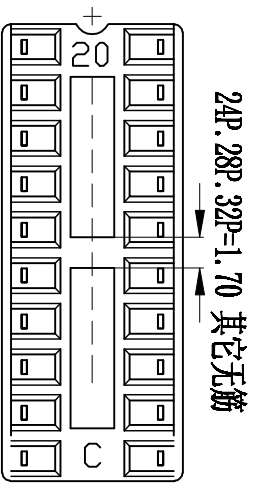

规格	A	B	C	D	E
6	5.08 $^{0.00}_{-0.05}$	7.62 $^{0.00}_{-0.05}$			
8	7.62 $^{0.00}_{-0.05}$	10.16 $^{0.00}_{-0.05}$			
14	15.24 $^{0.00}_{-0.05}$	17.78 $^{0.00}_{-0.05}$			
16	17.78 $^{0.00}_{-0.05}$	20.32 $^{0.00}_{-0.05}$	8.20 $^{+0.10}_{-0.10}$	7.62 $^{+0.10}_{-0.10}$	10.04 $^{+0.10}_{-0.05}$
18	20.32 $^{0.00}_{-0.05}$	22.86 $^{0.00}_{-0.05}$			
20	22.86 $^{0.00}_{-0.05}$	25.40 $^{0.00}_{-0.05}$			
24	27.94 $^{0.00}_{-0.05}$	30.48 $^{0.00}_{-0.05}$	No stock		
28	33.02 $^{0.00}_{-0.05}$	35.56 $^{0.00}_{-0.05}$			
32	38.10 $^{0.00}_{-0.05}$	40.64 $^{0.00}_{-0.05}$	未生产		